Quotation of Layer Cage System



Egg Collecting Machine For H type layer cage installed



Egg Collecting Machine On Test



H type layer cage installed in Southeast Asia



H type layer cage system running in Southeast Asia


To: Mr.Miguel Hernandez/NidoSmart

From:FAMTECH/ABC Machinery/Betty Han

NO.BS04H101326



www.chickenscage.com

Summary				
No.	Item	Unit	QTY	Price(USD/EXW)
I	Chicken feeding machine	One house	1	1,788
II	Nipple drinking system	One house	1	903.8
III	Layer cage system	One house	1	4,253.16
IV	Egg collecting system	One house	1	3,272.6
V	Environmental Control Equipment	One house	1	5719.6
VI	Lighting system	One house	1	945.65
	Total price of one chicken coop (EXW/USD)			16,882
	Inland freight and Shipping cost (FOB/USD) 1*20GP Container			1,220
FOB QINGDAO PRICE (USD)				17,765
Sea freight & Inland freight & Port charges (USD) From Qingdao Port, China to San Francisco Acatepec, Puebla, Mexico				10,281
Total Delivered to Puebla Price(CIP/USD)				28,046
Advised chicken coop size: 17m*4m*4.2m			Total number: 640 birds	
We have quoted for 5 sets because one set alone would not be sufficient to demonstrate the actual operational effect or performance in a real farming environment.				

No.	Item	Specification	QTY	Unit	Unit price (EXW/USD)	Total Price (EXW/USD)	Photo
I .Chicken feeding equipment-feeding machine							
1	Skip hoist feeder	The hopper is made of galvanized steel and is CNC operated, with a travel path of up to 100 meters, and includes a material distributor.	1	set	1498	1498	
2	Traveling square tube	Hot-dip galvanized square tube	12	m	3.5	42	
3	Drive unit	Wanxin, the speed reducer is 380V 0.75KW.	1		248	248	
Subtotal price (EXW/USD)						1788	
II.Nipple drinking equipment							
1	Automatic dosing pump		1	set	370	370	
2	Water line front-end system - electronic water meter		1	set	4	4	
3	Waterline main inlet pipe	φ32 Taiwan Huaya tube	4	set	23	92	

4	Connect the pressure regulating valve hose and the recoil hose		4	set	4.6	18.4	
5	Cage pressure regulating valve assembly	Single tube	24	set	2.3	55.2	
6	12 nipple square tube waterline, 3.75 m/piece	Special double water sealing nipple	24	piece	0.8	19.2	
7	Hanging cup	1.2 meters long/set	4	piece	53	212	
8	Accessories	Glue, etc.	1	set	133	133	
Subtotal price (EXW/USD)						903.8	
III.Layer cage equipment							
1	Front-end components		1	set	810	810	
2	Backend components and driver system		1	set	1880	1880	
3	cage		5	set	215	1075	
4	Manure collection belt	1.0*1130mm	81.6	unit	2.6	212.16	
5	manger	Four-layer double-sided	5	meter	53	265	

6	NSM100 manure curtain	4 tiers	1	unit	11	11	
Subtotal price (EXW/USD)						4253.16	
IV.Automatic egg collecting machine equipment							
1	Egg collecting machine main body	275g galvanized sheet* Soft-shell egg separator, egg collection platform: 275g galvanized sheet, including broken egg rubber side railing.	1	set	2650	2650	
2	Egg collection belt	92mm high-quality PP material block	163.2	m	0.5	81.6	
3	Egg collection cards	polypropylene	40	piece	0.3	12	
4	drive unit	0.55KW Wanxin Motor	1	set	529	529	
Subtotal price (EXW/USD)						3272.6	

V.Chicken farming environment control equipment---Air fan							
1	Fan	1.1kw domestic special power Air volume:43170m³/h≈ 25,404 CFM Size:1380*1380*450 mm	2	set	287	574	
2	50" fan seal accessories	Brick wall machine	2	set			
Subtotal price (EXW/USD)						574	
V.Environmental Control Equipment-Air Inlet Window System							
1	CJ01 spring air inlet window		12	piece	11	132	
2	CJ01 spring air inlet window wind guide device		12	set			
3	Air intake window sealant	The gap is no more than 5mm	12	set	0.8	9.6	
4	Electric linear actuator (new style)	With feedback signal	2	set	130	260	
5	Air inlet controller		2	set	180	360	
6	Gable-end manual winch	For use with air inlet controller	1		29	29	
7	Left and right pulleys and accessories	Gable accessories	1		65	65	
8	Left and right pulleys and accessories	Dual tie rods	2	set	65	130	

Subtotal price (EXW/USD)						985.6	
V.Environmental Control Equipment-Electrical Control System							
1	Environmental Controller	7 inches	1	set	4160	4160	
2	Temperature Sensor	DMR	4	set			
3	Humidity Sensor	DMR	1	set			
4	Surge protector (installed in control box)		1	set			
5	Negative pressure gauge		1	set			
6	Smart alarm	Sound and light alarm	1	set			
7	Main control box	With intelligent alarm	1	set			
8	Auxiliary control box		1	set			
9	Seeder controller		1	set			
10	Manure removal control box	5 rows	1	set			
Subtotal price (EXW/USD)						4160	
Total price for Environmental Control Equipment(USD)						5719.6	
VI.Lighting system							
1	Light (bulb)	Dimming DC48V-7W-3000 K	14	pc	4.47	62.58	

2	wire	Waterproof light	134	m	1.52	203.68	
3	Dimming controller		1	set	679.39	679.39	

Other items:

1) Delivery time: approx. 40 days after receiving clients' prepayment.

2) Payment term:
2.1) If the amount is less than USD3000, 100% prepayment by T/T .
2.2) If the amount is more than USD3000, 30% as prepayment by T/T, the balance of 70% is paid before delivery.

3) Quality Guarantee Terms
Quality guarantee term is for 13 months from the shipping date /delivery date . Any broken which are caused by machine-self and quality will be responsible by manufacturer. Others which are caused by operation mistakes, man-made problems, etc. will be responsible by buyers.

4) Valid time of price

This quotation is valid for 30 days for EXW and FOB price , and 15 days for CNF or CIF price.

5) Electricity situation

All machines listed above are based on 380 Volts, 50Hz, 3 phases or 220 Volts ,50Hz , single phase motors. If the power situation of buyers' location is not same as phase 3, 380 Volts ,50Hz or single phase , 220 Volts, 50Hz , please kindly inform us , and we can match the suitable motors to meet your demands about the power situation , but the extra cost of special motors will be added accordingly .

6)Installation conditions

①The buyer need arrange several workers, they will need cooperate to finish the installation , and the technicians of supplier will train them how to operate and maintain the machines during the installation and debugging .

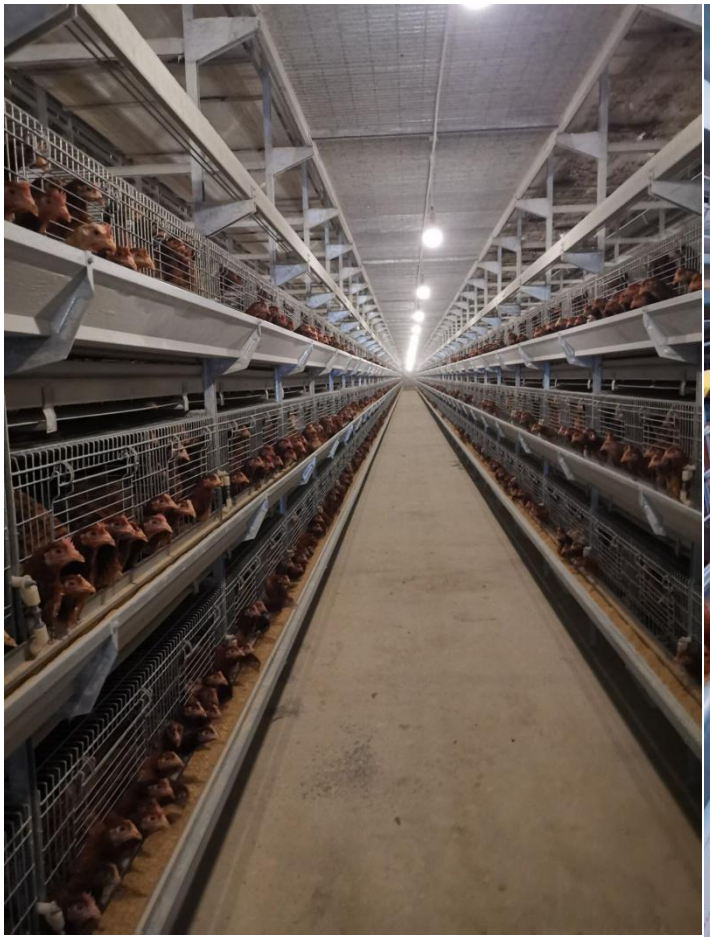
②If necessary ,the supplier will dispatch 2-3 technicians (one person part-time job as translator) to buyers' factory to guide installation and debugging and training to the workers of buyers ; the buyer need take responsibility for the round trip air tickets ,Visa cost and expenses of board and lodging)

③The time of installation and debugging is about 20-30 days, USD100/person/day; if the time delayed because of the unprepared/unready condition of buyer , for example , the water , electricity or steam is not ok or no workers for cooperating well, then extra USD50/person/day will be added for the delayed times .

Reference photos











Website: www.chickenscage.com Emai：bh@gcmec.com Tel: ++86 372 5965148-8091 Fax: ++86 372 5951936 Mobile: ++86 17703727936